


Dimensions U 400 Euro 5, type BM 405.123, Wheelbase 3,600 mm

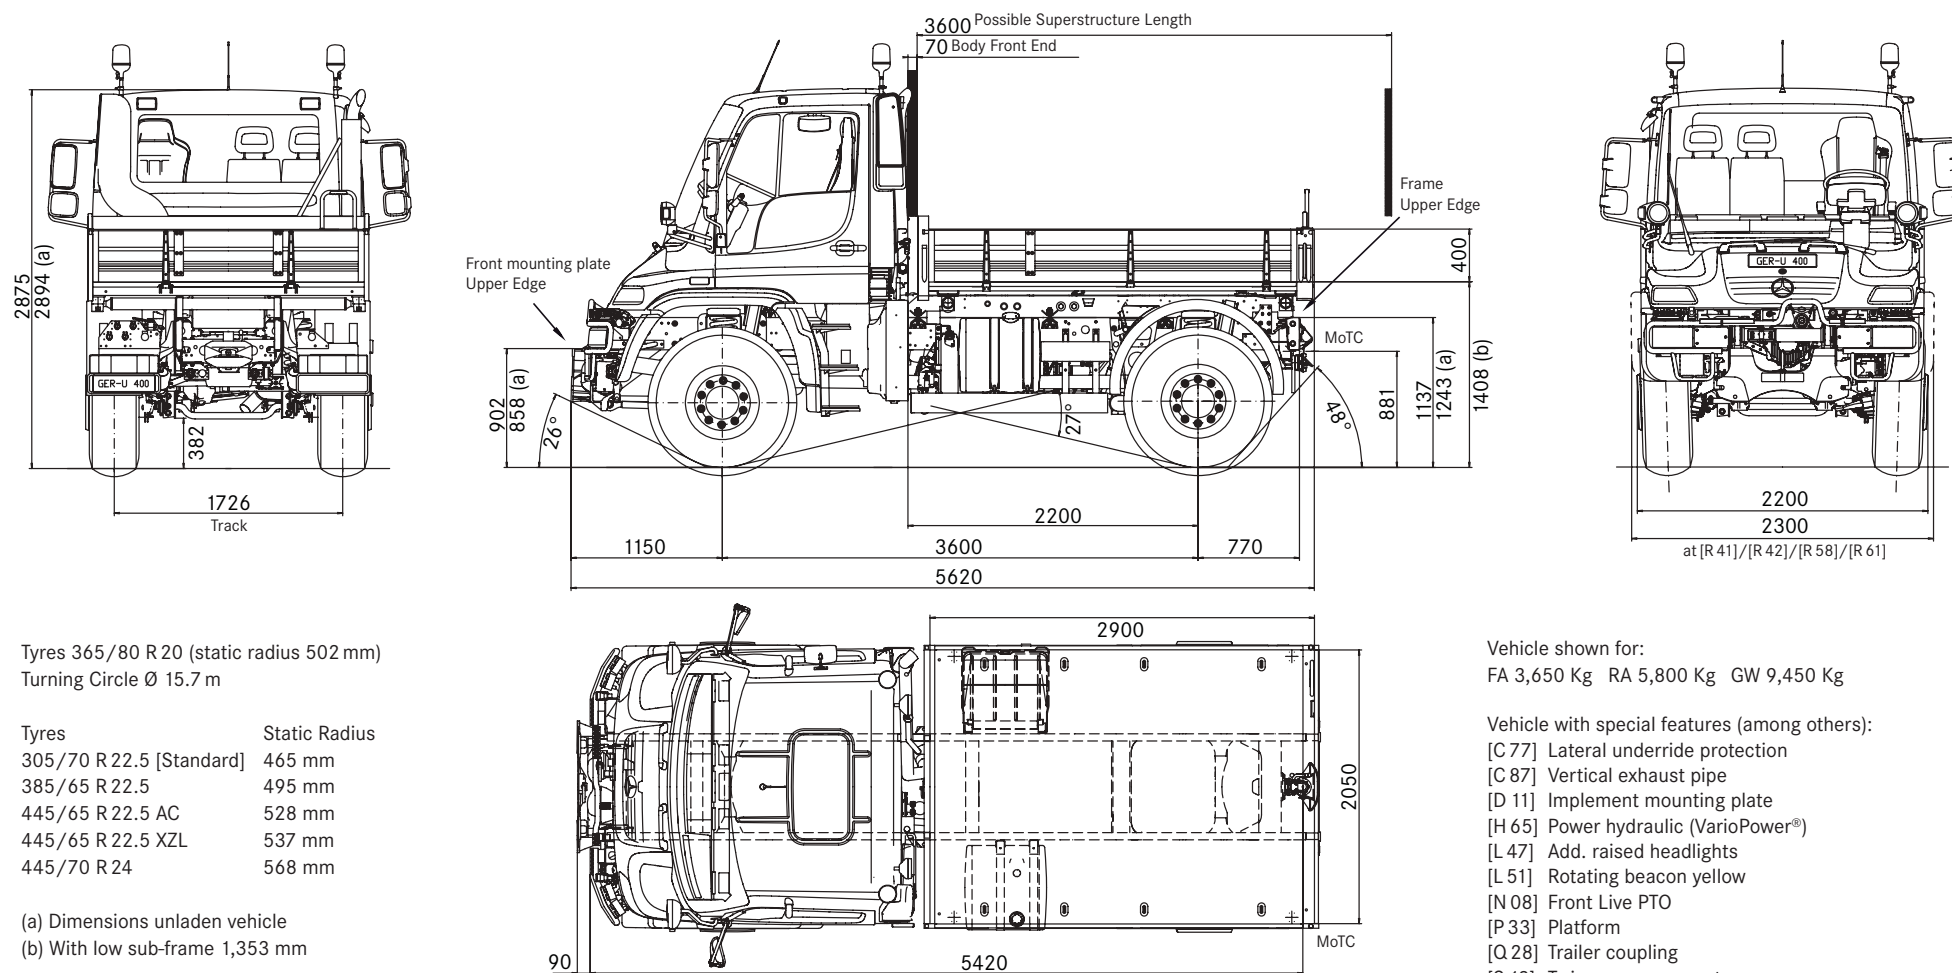

Tyres 365/80 R 20 (static radius 502 mm)
Turning Circle Ø 15.7 m

Tyres	Static Radius
305/70 R 22.5 [Standard]	465 mm
385/65 R 22.5	495 mm
445/65 R 22.5 AC	528 mm
445/65 R 22.5 XZL	537 mm
445/70 R 24	568 mm

(a) Dimensions unladen vehicle
(b) With low sub-frame 1,353 mm

All dimensions in [mm]
MoTC = Mid of Trailer Coupling

Vehicle shown for:
FA 3,650 Kg RA 5,800 Kg GW 9,450 Kg

Vehicle with special features (among others):

- [C 77] Lateral underride protection
- [C 87] Vertical exhaust pipe
- [D 11] Implement mounting plate
- [H 65] Power hydraulic (VarioPower®)
- [L 47] Add. raised headlights
- [L 51] Rotating beacon yellow
- [N 08] Front Live PTO
- [P 33] Platform
- [Q 28] Trailer coupling
- [S 12] Twin passenger seat

Note: The lateral underride protection is required by legal regulations.